

GAR-MAX[®]

SELF-LUBRICATING FIBERGLASS REINFORCED PLAIN BEARINGS



APPLICATIONS

Industrial – Steering linkages, hydraulic cylinder pivots, king pin bearings, boom lifts, scissor lifts, cranes, hoists, lift gates, backhoes, trenchers, skid steer loaders, front end loaders, etc.

CHARACTERISTICS

- High load capacity
- Excellent shock and misalignment resistance
- Excellent contamination resistance
- Very good friction and wear properties
- Good chemical resistance
- Very good dry wear performance
- GAR-MAX[®] bearing sizes available according to DIN ISO 4379 for the replacement of traditional greased bronze bearings

AVAILABILITY

Bearing forms available in standard dimensions:
Plain cylindrical bushes

Bearing forms made to order: cylindrical bushes with non-standard lengths and wall thickness, flanged bearings, hexagonal and square bores, liner on outer diameter, customized bearing designs



BEARING PROPERTIES		UNITS	VALUE
--------------------	--	-------	-------

GENERAL

Maximum load, p	Static	N/mm ²	210
	Dynamic	N/mm ²	140
Operating temperature	Min	°C	- 195
	Max	°C	160

DRY

Maximum sliding speed, U		m/s	0.13
Maximum pU factor		N/mm ² x m/s	1.05
Coefficient of friction, f			0.05 - 0.30*

RECOMMENDATIONS

Shaft surface roughness, Ra		µm	0.15 - 0.40
Shaft surface hardness	Normal	HB	> 350
	For longer service life	HB	> 480

* Depending on operating conditions


OPERATING PERFORMANCE

Dry	Very Good
Oil lubricated	Fair
Grease lubricated	Fair
Water lubricated	Fair
Process fluid lubricated	Poor

FOR SUPERIOR PERFORMANCE

Oil lubricated	GAR-FIL
Grease lubricated	DX / DX10
Water lubricated	HPF / HPM
Process fluid lubricated	GAR- FIL

MICROSECTION

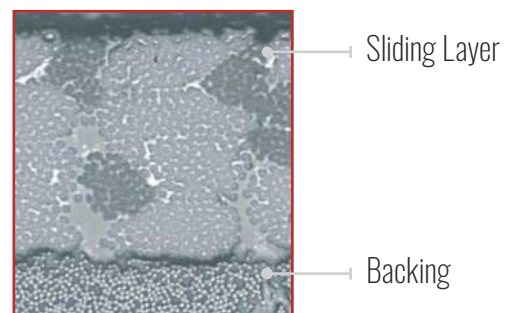

For additional product offerings visit:
<https://www.ggbearings.com/en/our-products/fiber-reinforced-composite-bearings/gar-max>