

Multifil

Proprietary Filled PTFE Sliding Bearing Tape

[Request a quote](#)



- [Datasheet](#)
- [Brochure](#)

- [Return to homepage](#)
- Print
- Pdf
- Node
- Entity Print

[Share](#)

[Print](#)

Characteristics

- Superior sliding bearing material which can be easily bonded to any clean, rigid substrate
- Reduces vibration
- Tested acc. to ASTM E595/ECSS-Q-ST-70-02C - Outgassing properties of

materials used in Spacecraft equipment

AVAILABILITY

Bearing forms available in standard dimensions

- Bearing tape

Special forms made to order: Tape with 0.015" to 0.125" (0.38 to 3.2 mm) thickness and 12" (305 mm) width or 24" (610 mm) width

Brochure

GGB FRC Range - Fiber Reinforced Composite Bearings - High Load Self-Lubricating Bearings

[Download](#)

Datasheet

GGB Multifil - Proprietary Filled PTFE Sliding Bearing Tape


File / Datasheet

[Download](#)

Composition

Filled PTFE Bearing Tape

Etched on One Side

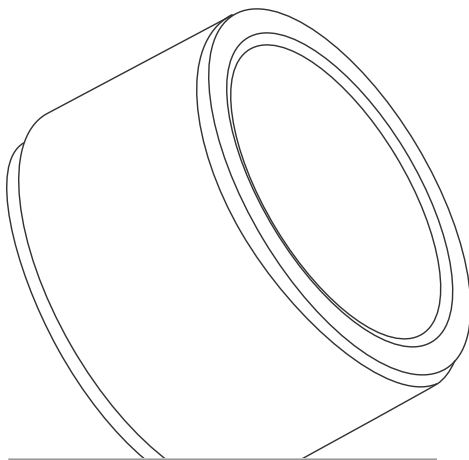

[Find all parts and dimensions](#)

You may also like

[GAR-FIL](#)



[Fiber Reinforced Composite Bearing with PTFE Tape Liner](#)
[Request a quote](#)

- [Datasheet](#)
- [Brochure](#)

[HPF®](#)



[Fiber Reinforced Composite Bearings with PTFE Tape Liner](#)
[Request a quote](#)

- [Datasheet](#)
- [Brochure](#)

GGB's benefits

- 

GGB Advantage

[Find out how GGB can be the solution you need](#)



Careers

[Review our current job openings and apply.](#)



Quality Driven

[Quality and environmental respect are essential to our core values](#)



Partnership

[Learn more about partnering with GGB and the benefits of a collaborative partnership.](#)



Enpro

[GGB, an Enpro company](#)



TriboU

[Providing the working engineer with an understanding of basic tribological](#)

[concepts](#)

Need advice?

Our experts are ready to help you find the right solution for your specific application.

[Contact us](#)