




EP®15

ENGINEERED FOR SUN

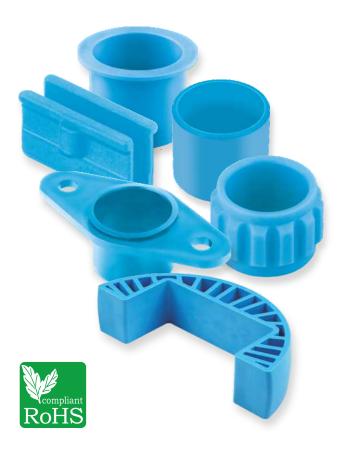

APPLICATIONS

Solar Power Equipment, Outdoor Applications, Recreational Applications

CHARACTERISTICS

- UV-resistant
- Abrasion-resistant
- Lightweight
- Low coefficient of friction
- Very good bushing performance in dry working conditions
- Good bushing performance in lubricated or marginally lubricated applications
- Corrosion-resistant in humid/saline environments
- Very good price performance ratio
- Very good weight performance ratio
- Within injection molding tool feasibility unlimited dimensions and design features
- Compliant to ELV, WEEE and RoHS specifications

AVAILABILITY

Bearing forms made to order: Cylindrical bushings, flanged bushings, thrust washers, sliding plates, half-bushings, customized bearing designs







EP®15 DATASHEET



POLYMER: POM (POLYOXYMETHYLENE)

ADDITIVES: PTFE (POLYTETRAFLUOROETHYLENE), UV STABILIZER

CHARACTERISTICS	STANDARD	VALUE	UNITS
Charpy unnotched impact strength	ISO 179/1eU	kJ/m²	45
Charpy notched impact strength	ISO 179/1eA	kJ/m²	4,5
Coefficient of linear thermal expansion	ISO 11359-2:1999-10	x10 ⁻⁶	120
Minimum temperature		°C/°F	- 40 / - 40
Maximum temperature		°C/°F	125 / 260
Maximum extended temperature limit		°C/°F	125 / 260
Density	DIN EN ISO 1183-1 :2013-04 DIN EN ISO 1183-2 :2004-10	g/cm³	1,50
Tensile strength	DIN EN ISO 527-1 :2012-06 DIN EN ISO 527-2 :2012-06 DIN EN ISO 527-3 :2003-07	N/mm² / psi	50 / 7252
Elastic modulus in tension	DIN EN ISO 178:2013-09 DIN EN ISO 527-1:2012-06 DIN EN ISO 604:2003-12	N/mm² / psi	2750 / 398854
Maximum static load		N/mm² / psi	65 / 9500
Coefficient of friction, f			0,09 - 0,15
Color			Blue

OPERATING PERFORMANCE		
Dry	Very Good	
Oil lubricated	Good	
Grease lubricated	Good	
Water lubricated	Fair	
Process fluid lubricated	Good after resistance testing	

MICROSECTION

