

Move Forward with TriboShield® Coating Solutions





TS225 is based on a nanostructured thermoset polymer designed for low friction and high wear resistance at low to medium loads in dry or lubricated conditions. TS225 is part of the standard TriboShield[®] product range.

TYPICAL APPLICATIONS

- Piston skirts for internal combustion engines
- Garden and DYI tools

UNIQUE CHARACTERISTICS

- Excellent friction at high sliding speeds
- Very good friction in lubricated conditions
- Applicable to heat-sensitive substrates
- High surface hardness

TRIBOMATE® UPGRADE AVAILABLE

Yes



TriboShield[®] coated products examples



For questions and assistance, contact a GGB engineer at: https://www.ggbearings.com/en/contact

TriboShield® TS225



TECHNICAL DATA

COATING PROPERTY	UNIT	VALUE
Color*	-	Black
Maximum continuous service temperature	°C / °F	120 / 248
Maximum short-term peak temperature	°C / °F	130 / 266
Friction coefficient, typical range**	-	0.04 - 0.25
Food contact compliant***	-	No


* Other colors possible upon customization request (limited)

** Dependent on contact pressure, sliding speed and contact geometry.

*** Your specific food contact condition may require additional approval.

Please contact your GGB representative for more information.

TriboShield[®] Standard Product Range

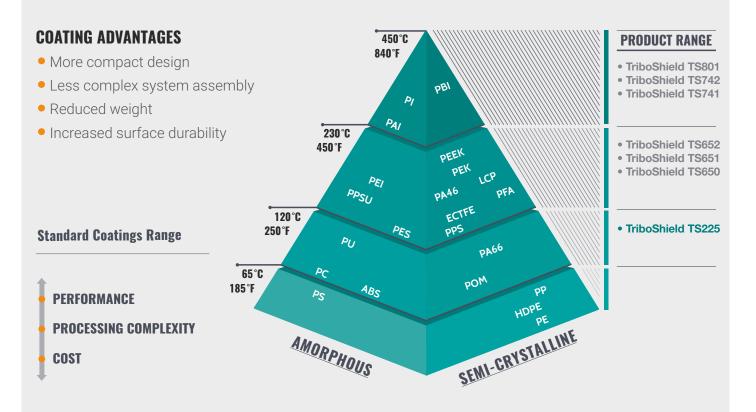

For additional product offerings visit: https://www.ggbearings.com/en/our-products/polymer-coatings/triboshield-ts225